



Product Approval
USER: Public User

[Product Approval Menu](#) > [Product or Application Search](#) > [Application List](#) > **Application Detail**

► OFFICE OF THE
SECRETARY

FL #	FL9777-R13												
Application Type	Revision												
Code Version	2020												
Application Status	Approved												
Comments													
Archived	<input type="checkbox"/>												
Product Manufacturer	Owens Corning												
Address/Phone/Email	One Owens Corning Parkway Toledo, OH 43659 (740) 404-7829 greg.keeler@owenscorning.com												
Authorized Signature	Greg Keeler greg.keeler@owenscorning.com												
Technical Representative													
Address/Phone/Email													
Quality Assurance Representative													
Address/Phone/Email													
Category	Roofing												
Subcategory	Underlayments												
Compliance Method	Evaluation Report from a Florida Registered Architect or a Licensed Florida Professional Engineer <input type="checkbox"/> Evaluation Report - Hardcopy Received												
Florida Engineer or Architect Name who developed the Evaluation Report	Zachary R. Priest												
Florida License	PE-74021												
Quality Assurance Entity	PRI Construction Materials Technologies, LLC												
Quality Assurance Contract Expiration Date	12/31/2024												
Validated By	Steven M. Urich, PE <input checked="" type="checkbox"/> Validation Checklist - Hardcopy Received												
Certificate of Independence	FL9777_R13_COI_OCR14002.10a_2020_FBC_Eval_Weatherlock_Non-HVHZ_final.pdf												
Referenced Standard and Year (of Standard)	<table border="0"> <thead> <tr> <th>Standard</th> <th>Year</th> </tr> </thead> <tbody> <tr> <td>ASTM D 1970</td> <td>2015</td> </tr> <tr> <td>ASTM D 226</td> <td>2009</td> </tr> <tr> <td>ASTM G 155</td> <td>2013</td> </tr> <tr> <td>TAS 103</td> <td>2020</td> </tr> <tr> <td>UL 1897</td> <td>2012</td> </tr> </tbody> </table>	Standard	Year	ASTM D 1970	2015	ASTM D 226	2009	ASTM G 155	2013	TAS 103	2020	UL 1897	2012
Standard	Year												
ASTM D 1970	2015												
ASTM D 226	2009												
ASTM G 155	2013												
TAS 103	2020												
UL 1897	2012												
Equivalence of Product Standards Certified By													
Sections from the Code													

Product Approval Method

Method 1 Option D

Date Submitted	10/22/2020
Date Validated	10/23/2020
Date Pending FBC Approval	10/28/2020
Date Approved	12/15/2020
Date Revised	12/17/2020

Summary of Products

FL #	Model, Number or Name	Description
9777.1	Weatherlock G	Weatherproofing Underlayment
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: See evaluation report for limits of use.		Installation Instructions FL9777_R13_II_OCR14002.10a_2020_FBC_Eval_Weatherlock_Non-HVHZ_final.pdf Verified By: Zachary R. Priest 74021 Created by Independent Third Party: Yes Evaluation Reports FL9777_R13_AE_OCR14002.10a_2020_FBC_Eval_Weatherlock_Non-HVHZ_final.pdf Created by Independent Third Party: Yes
9777.2	WeatherLock G (High Tear)	Weatherproofing Underlayment
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: See evaluation report for limits of use.		Installation Instructions FL9777_R13_II_OCR14002.10a_2020_FBC_Eval_Weatherlock_Non-HVHZ_final.pdf Verified By: Zachary R. Priest PE-74021 Created by Independent Third Party: Yes Evaluation Reports FL9777_R13_AE_OCR14002.10a_2020_FBC_Eval_Weatherlock_Non-HVHZ_final.pdf Created by Independent Third Party: Yes
9777.3	Weatherlock MAT	Waterproofing Underlayment
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: No Impact Resistant: N/A Design Pressure: N/A Other: See evaluation report for limits of use.		Installation Instructions FL9777_R13_II_OCR14002.10b_2020_FBC_Eval_Weatherlock_HVHZ_final.pdf Verified By: Zachary R. Priest 74021 Created by Independent Third Party: Yes Evaluation Reports FL9777_R13_AE_OCR14002.10b_2020_FBC_Eval_Weatherlock_HVHZ_final.pdf Created by Independent Third Party: Yes
9777.4	Weatherlock MAT	Waterproofing Underlayment
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: See evaluation report for limits of use.		Installation Instructions FL9777_R13_II_OCR14002.10a_2020_FBC_Eval_Weatherlock_Non-HVHZ_final.pdf Verified By: Zachary R. Priest 74021 Created by Independent Third Party: Yes Evaluation Reports FL9777_R13_AE_OCR14002.10a_2020_FBC_Eval_Weatherlock_Non-HVHZ_final.pdf Created by Independent Third Party: Yes
9777.5	WeatherLock Metal	Weatherproofing Underlayment
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: N/A Other: See evaluation report for limits of use.		Installation Instructions FL9777_R13_II_OCR14002.10a_2020_FBC_Eval_Weatherlock_Non-HVHZ_final.pdf Verified By: Zachary R. Priest PE-74021 Created by Independent Third Party: Yes Evaluation Reports FL9777_R13_AE_OCR14002.10a_2020_FBC_Eval_Weatherlock_Non-HVHZ_final.pdf Created by Independent Third Party: Yes
9777.6	WeatherLock Metal	Weatherproofing Underlayment
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: No Impact Resistant: N/A		Installation Instructions FL9777_R13_II_OCR14002.10b_2020_FBC_Eval_Weatherlock_HVHZ_final.pdf Verified By: Zachary R. Priest PE-74021 Created by Independent Third Party: Yes

Design Pressure: N/A Other: See evaluation report for limits of use.		Evaluation Reports FL9777 R13 AE OCR14002.10b 2020 FBC Eval Weatherlock HVHZ final.pdf Created by Independent Third Party: Yes
9777.7	WeatherLock Specialty Tile & Metal	Weatherproofing Underlayment
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: N/A Design Pressure: +0/-142.5 Other: See evaluation report for limits of use.		Installation Instructions FL9777 R13 II OCR14002.10a 2020 FBC Eval Weatherlock Non-HVHZ final.pdf Verified By: Zachary R. Priest 74021 Created by Independent Third Party: Yes Evaluation Reports FL9777 R13 AE OCR14002.10a 2020 FBC Eval Weatherlock Non-HVHZ final.pdf Created by Independent Third Party: Yes

[Back](#)
[Next](#)

[Contact Us](#) :: 2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824

The State of Florida is an AA/EEO employer. [Copyright 2007-2013 State of Florida](#). :: [Privacy Statement](#) :: [Accessibility Statement](#) :: [Refund Statement](#)

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. *Pursuant to Section 455.275(1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click [here](#).

Product Approval Accepts:





EVALUATION REPORT

FLORIDA BUILDING CODE, 7TH EDITION (2020)

Manufacturer: OWENS CORNING
1 Owens Corning Parkway
Toledo, OH 43657
(800) 438-7465
www.owenscorning.com
Issued October 23, 2020

Manufacturing Location: Brentwood, NH
Houston, TX

Quality Assurance: PRI Construction Materials Technologies, LLC (QUA9110))

SCOPE

Category: Roofing
Subcategory: Underlayments
Code Sections: 1504.3.1, 1507.1.1
Properties: Physical properties

REFERENCES

<u>Entity</u>	<u>Report No.</u>	<u>Standard</u>	<u>Year</u>
PRI Construction Materials Technologies (TST5878)	NEI-039-02-01	ASTM D 1970	2015a
PRI Construction Materials Technologies (TST5878)	NEI-042-02-01REV2	ASTM D 1970	2015a
PRI Construction Materials Technologies (TST5878)	NEI-045-02-01	ASTM G 155	2013
PRI Construction Materials Technologies (TST5878)	NEI-053-02-01	ASTM G 155	2013
PRI Construction Materials Technologies (TST5878)	NEI-093-02-02	ASTM D 1970	2015a
PRI Construction Materials Technologies (TST5878)	OCF-213-02-01	ASTM D 1623	2009
PRI Construction Materials Technologies (TST5878)	OCF-237-02-01	UL 1897	2012
PRI Construction Materials Technologies (TST5878)	OCF-252-02-01	ASTM D 4798	2011
PRI Construction Materials Technologies (TST5878)	OCF-252-02-01	ASTM D 1970	2015a
PRI Construction Materials Technologies (TST5878)	OCF-253-02-02	ASTM D 1970	2015a
PRI Construction Materials Technologies (TST5878)	OCF-293-02-01	ASTM D 1970	2015a
PRI Construction Materials Technologies (TST5878)	OCF-296-02-02	ICC-ES AC 188 ¹	2012
		ICC-ES AC 48	2012
PRI Construction Materials Technologies (TST5878)	OCF-297-02-01.1	ASTM D 1970	2015a
PRI Construction Materials Technologies (TST5878)	OCF-318-02-01	ASTM D 1970	2015a
PRI Construction Materials Technologies (TST5878)	OCF-320-02-01	ASTM G 155	2005a2013
PRI Construction Materials Technologies (TST5878)	OCF-321-02-01	ASTM D 1623	2009
PRI Construction Materials Technologies (TST5878)	OCF-322-02-01	UL 1897	2012
PRI Construction Materials Technologies (TST5878)	OCF-355-02-01	UL 1897	2012
PRI Construction Materials Technologies (TST5878)	1378T0120	TAS 103	2020
PRI Construction Materials Technologies (TST5878)	1378T0121	ASTM D 1623	2019
		TAS 103	2020

¹Determined to be equivalent to ASTM D 226-09, Type I and II

PRODUCT DESCRIPTION AND LIMITS OF USE

WeatherLock® G
(Brentwood, NH or Houston, TX)

WeatherLock® G is an ASTM D 1970 self-adhered underlayment constructed from SBS modified asphalt, a fiberglass mat reinforcement and surfaced with granules. The product is supplied in 2-sq. rolls with nominal dimensions of 3-ft x 66.7-ft.

WeatherLock® G is permitted to be used as prescribed in FBC Section 1507.1.1 and Table 1507.1.1.1 for mechanically attached roofing coverings. Exposure on the roof deck shall be limited to a maximum 30 days.

WeatherLock® Mat
(Brentwood, NH or Houston, TX)

WeatherLock® Mat is an ASTM D 1970 self-adhered underlayment constructed from SBS modified asphalt with a fiberglass mat reinforcement. The product is supplied in 1-sq. rolls with nominal dimensions of 3-ft x 33.3-ft and 2 sq. rolls with nominal dimensions of 3-ft x 66.7-ft.

WeatherLock® Mat is permitted to be used as prescribed in FBC Section 1507.1.1 and Table 1507.1.1.1 for mechanically attached roof coverings. Exposure on the roof deck shall be limited to a maximum 30 days.

WeatherLock® Metal
(Brentwood, NH)

WeatherLock® Metal is an ASTM D 1970 self-adhered underlayment constructed from SBS modified asphalt with a fiberglass mat reinforcement and plastic film surface. The product is supplied in 2.0 sq. rolls with nominal dimensions of 3-ft x 66.7-ft.

WeatherLock® Metal is permitted to be used as prescribed in FBC Section 1507.1.1 and Table 1507.1.1.1 for mechanically attached roof coverings. Exposure on the roof deck shall be limited to a maximum 90 days.

WeatherLock® Specialty Tile & Metal
(Brentwood, NH)

WeatherLock® Specialty Tile & Metal is an ASTM D 1970, TAS 103 and FRSA/TRI *Florida High Wind Concrete and Clay Tile Installation* Manula, Sixth Edition compliant self-adhered underlayment constructed from SBS modified asphalt and surfaced with a non-woven polyester fabric. The product is supplied in 2.14 sq. rolls with nominal dimensions of 3-ft x 71.3-ft.

WeatherLock® Specialty Tile & Metal is permitted to be used as prescribed in FBC Section 1507.1.1 and Table 1507.1.1.1. WeatherLock® Specialty Tile & Metal is permitted to be used with adhered clay or concrete tile roofing using Dupont TILE BOND™ Roof Tile Adhesive. Exposure on the roof deck shall be limited to a maximum 90 days.

The maximum roof slope shall be 6:12 when used with clay or concrete tile installations without battens. Tile shall be stored on battens for roof slopes greater than 6:12. Tiles shall not be stacked greater 10 tiles per stack.

WeatherLock® G (High Tear)
(Houston, TX)

WeatherLock® G (High Tear) is an ASTM D 1970 self-adhered underlayment used as an alternative to ASTM D 226, Type II roofing felt. The underlayment is composed of SBS modified asphalt with a fiberglass mat internal reinforcement and is surfaced with granules. The product is supplied with a nominal thickness of 50 mils in 1.95-sq rolls with nominal dimensions of 3-ft x 65-ft.

WeatherLock® G (High Tear) is permitted to be used as prescribed in FBC Section 1507.1.1 and Table 1507.1.1.1 for mechanically attached roof coverings. Exposure on the roof deck shall be limited to a maximum 30 days.

PRODUCT APPLICATION

Min. Roof Slope: 2:12 in accordance with the FBC

Application: *All underlayments shall be installed in accordance with the FBC.*

Deck substrates shall be clean, dry, and free from any irregularities and debris. All fasteners in the deck shall be checked for protrusion and corrected prior to underlayment application. Prior to beginning installation, the underlayment shall be unrolled and allowed to relax for a minimum of 3-5 minutes.

The underlayment shall be installed with the release backer removed and pressed firmly into place to ensure complete contact with the deck. The underlayment shall be installed with the roll length parallel to the eave, starting at the eave, and with minimum 3" side laps and minimum 6" end laps staggered min. 6-ft. from preceding course.

Additionally, if applying WeatherLock® Specialty Tile & Metal, end laps shall be primed with ASTM D 41 primer or sealed with asphalt roof cement a minimum of 3-4 inches across the width of the lap.

It is permissible to back nail the underlayment 12-inches on-center as needed (nails shall be installed perpendicular to deck with the nail heads flush to the top surface of the underlayment).

Additionally, WeatherLock® Specialty Tile & Metal shall be back nailed when installed on roof slopes greater than 3:12.

Min. Application Temperature: 40°F; *Contact the manufacturer when installing at temperatures below the minimum application temperature.*

WIND RESISTANCE

The *Maximum Design Pressures* shown below were calculated using a 2:1 margin of safety per FBC Section 1504.9.

Underlayment System No.1 – WeatherLock Specialty Tile & Metal Only

Roof Deck: Min. 15/32-inch CDX plywood attached to wood supports spaced a maximum 24" o.c.

Underlayment: **WeatherLock® Specialty Tile & Metal** shall be applied in accordance with manufacturer's installation instructions to the fastened deck and backnailed along the selvage with minimum 12ga., 1-1/4-inch galvanized ring shank roofing nails through *optionally primed*, 32ga. x 1-5/8-inch Ø tin caps spaced 12" o.c. The applied underlayment shall be rolled with a minimum 75lb steel roller immediately following application.


Maximum Design Pressure: -142.5 psf

GENERAL LIMITATIONS

- 1) This evaluation report is not use in the HVHZ.
- 2) Fire Classification is not within the scope of this evaluation.
- 3) Installation of the evaluated product shall comply with this report, the FBC, and the manufacturer's published application instructions. Where discrepancies exist between these sources, the more restrictive and FBC compliant installation detail shall prevail.
- 4) The roof deck shall be constructed of closely fitted plywood sheathing for new or existing construction.
- 5) The space under the deck area shall be properly ventilated in accordance with the FBC requirements.
- 6) All side lap seams shall be installed to shed water from the deck.
- 7) The underlayment may be used as described in other current FBC product approval documents.
- 8) Design wind load pressures shall be determined for components and cladding in accordance with FBC 1609.
- 9) The roof deck shall be designed by others in accordance with FBC requirements to resist the design wind load pressures for components and cladding.
- 10) *Maximum Design Pressures* for a given underlayment shall meet or exceed the design wind loads determined for the roof assembly.
- 11) All products listed in this report shall be manufactured under a quality assurance program in compliance with Rule 61G20-3.

COMPLIANCE STATEMENT

The products evaluated herein by Zachary R. Priest, P.E. have demonstrated compliance with the Florida Building Code 7th Edition (2020) as evidenced in the referenced documents submitted by the named manufacturer.

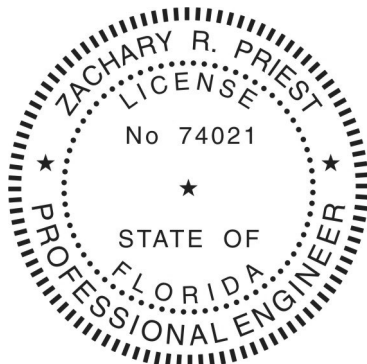


Digitally signed by Zachary R. Priest
CREEK Technical Services, LLC

2020.10.23
09:42:37
-04'00'

Zachary R. Priest, P.E.
Florida Registration No. 74021
Organization No. ANE9641

CERTIFICATION OF INDEPENDENCE

CREEK Technical Services, LLC does not have, nor will it acquire, a financial interest in any company manufacturing or distributing products under this evaluation.

CREEK Technical Services, LLC is not owned, operated, or controlled by any company manufacturing or distributing products under this evaluation.

Zachary R. Priest, P.E. does not have, nor will acquire, a financial interest in any company manufacturing or distributing products under this evaluation.

Zachary R. Priest, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.

END OF REPORT